

Alternative to tie wraps:


Used 1/4" Ring Terminal 12-10 GA connector

Removed Insulator

Soldered joint shut

Added solder to end on both sides (to remove sharp edges)

Tapped 6-32

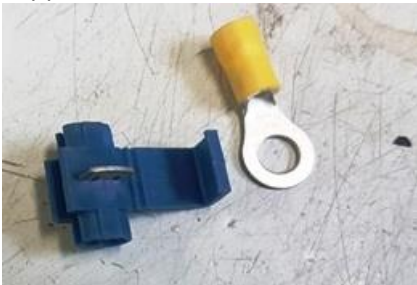

Used 18-16 GA Moisture Resistant Tap Connector

Remove Spade

Used small file to open center

Securely locks belt & works as tensioner

